BODY TYPE

SQUARE (ROCK)

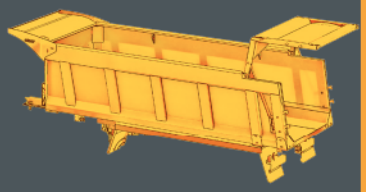

Type	Square model for heavy rock	
	HD 5395 TS	HD 5380 T
Volume	± 40m³ (liquid) [1]	± 34m³ (liquid) [1]
Cilinders	Two under body	One cilinder front
Canopy	Canopy over equipment behind cab / over full cab	
Tipping up	Tipping up ± 40sec	
Tipping down	Tipping down ± 29sec	
Floor	Sandwich, 8mm S355, 20mm rubber, 10mm 450HB	
Stabilisor	Scissor stabiliser, form maximised stability during tipping	
Opening back	Rear hatch opening by hydraulic cylinders. Rear hatch locked to keep it in place, opened by same cylinder as hatch	
Color:	Same as cabin, target payload and volume indicated at the side	
Safety:	Hyfix system to lock body on to chassis in lowered position Safety body props to be used when service is being applied	

HALF PIPE

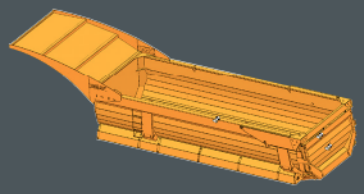

Type	Half pipe shape for several types of ore	
	HD 5395 TS	HD 5380 T
Volume	± 32m³ (liquid) [1]	± 27m³ (liquid) [1]
Cilinders	Two under body	One cininder front
Canopy	Canopy over equipment behind cab / over full cab	
Tipping up	Tipping up ± 40sec	
Tipping down	Tipping down ± 29sec	
Material	Hardox 450 8mm, last 2.500mm from floor 10mm	
Stabilisor	Scissor stabiliser, form maximised stability during tipping	
Opening back	Rear hatch automated opening with chain 8mm Hardox 450, rear hatch slides into locks to keep it in place	
Color:	Same as cabin, target payload and volume indicated at the side	
Safety:	Hyfix system to lock body on to chassis in lowered position Safety body props to be used when service is being applied	

MULTI BENDED

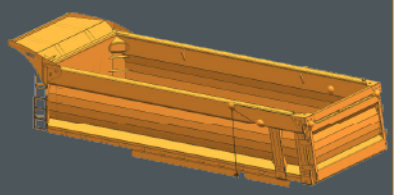

Type	Multi bended model for relative light materials	
	HD 5395 TS	HD 5380 T
Volume	± 40m³ (liquid) [1]	± 30m³ (liquid) [1]
Cilinders	Two under body	One cilinder front
Canopy	Canopy over equipment behind cab / over full cab	
Tipping up	Tipping up ± 40sec	
Tipping down	Tipping down ± 29sec	
Material	Hardox 450 10mm, last 2.500mm from floor 10mm	
Stabilisor	Scissor stabiliser, form maximised stability during tipping	
Opening back	Rear hatch automated opening with chain 6mm Hardox 450, rear hatch slides into locks to keep it in place	
Color:	Same as cabin, target payload and volume indicated at the side	
Safety:	Hyfix system to lock body on to chassis in lowered position Safety body props to be used when service is being applied	

[1] Adaptable to customer requirements

BODY TYPE

SQUARE (ROCK)

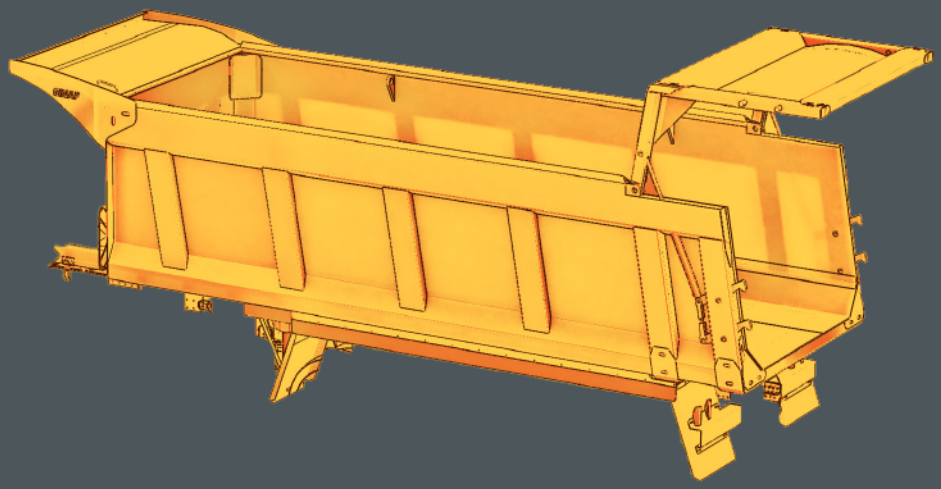

Liquid Volume	
HD 5380 T	± 34m³
HD 5395 TS	± 40m³

HALF PIPE

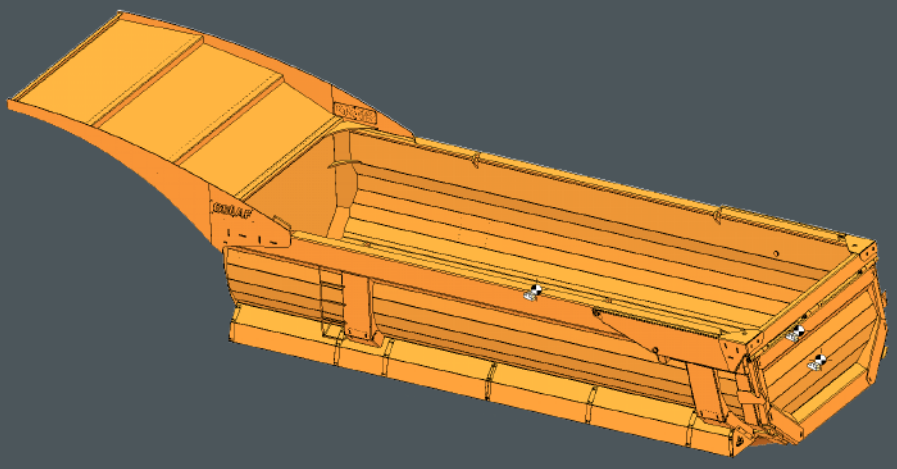

Liquid Volume	
HD 5380 T	± 27m³
HD 5395 TS	± 32m³

MULTI BENDED

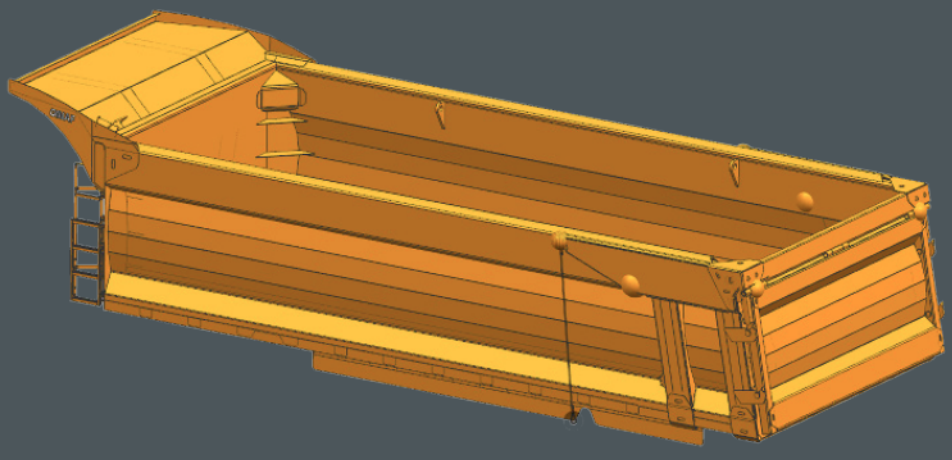

Liquid Volume	
HD 5380 T	± 30m³
HD 5395 TS	± 40m³